


ARTEMIS 2 WD

RECESSED DOWNLIGHT W/ WARM DIM

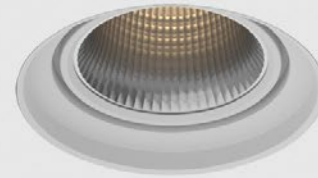

Artemis 2 WD - Recessed Downlight with Warm Dim. Artemis 2 WD features SENSO-designed reflectors and our warm dim feature to mimic the effect of a standard light bulb in an efficient lighting package. As part of the Artemis family of downlights, it's easy to get a cohesive design regardless of fixture size or style.

Ordering Code

Fixture	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
	1	2	3	4	5	6	7	8	9
Driver	<input type="text"/>	<input type="text"/>	<input type="text" value="--"/>	<input type="text"/>	<input type="text"/>	<input type="text" value="--"/>	<input type="text" value="--"/>	<input type="text" value="--"/>	<input type="text"/>
	1	2	3	4	5	6	7	8	

Product Specifications

SAMPLE: Fixture **AR2D - TL - WD - 615 - 30 - 15 - DL - 02 - 08** | Driver **910 - AR2D - TL - STD - 120 - WD - 15 - 08**

1 - Model	2 - Trim	3 - LED	4 - Optic	5 - CCT	6 - Lumen	7 - Accessory	8 - Trim Color
AR2D · Artemis 2 Downlight	FL · Flanged TL · Trimless	WD · Warm Dim (90 CRI)	<i>Faceted</i> 615 · 15° 630 · 30° 645 · 45° 660 · 60°	30 · 3000K dimmed to 1800K	15 · 1500 (16W) 20 · 2000 (24W)	00 · No Accessory DL · Diffusing Lens	01 · White 02 · Black 08 · Silver XX · Custom
AR2A · Artemis 2 Adjustable			<i>Smooth</i> 630S · 30° 645S · 45°				
AR2W · Artemis 2 Wall Wash							

9 - Baffle Color	1 - Housing Style	2 - Model	3 - Trim	4 - Driver	Dim Level	Dim Level
01 · White 02 · Black 08 · Silver XX · Custom	910 · Remote** 915 · New Construction 920 · IC Housing*6 930 · Chicago Plenum*6	Same as Fixture	Same as Fixture	STD · Non Dimming LCS · 0 - 10 Volt Protocol ELDOLC · EldoLED 0 - 10 Volt*4 DALI · Dali Protocol*4	N/A 1% 0.1% 0.1%	LUTES · Hilume Ecodigital*4 1% LUT2W · 2 Wire for phase*3/4 1% DMX · SENSO*3/4 CSMB · Casambi Wireless Control*4

5 - Voltage	6 - LED	7 - Lumen	8 - Baffle Color*5		
120 · 120V 277 · 277V	Same as Fixture	Same as Fixture	Same as Fixture	*1 Required for trimless *2 Cannot exceed 1500lm *3 Not available in 277V *4 Remote mounted driver *5 Only needed for Trimless *6 JAS Compliant	Project : _____ Quantity : _____ Type : _____ Notes : _____

ARTEMIS 2 WD

RECESSED DOWNLIGHT W/ WARM DIM

Light Engine


- Output:** up to 2000lm
- High Efficacy:** up to 98 lumen/Watt
- Color Temperature (CCT):** 3000K dimmed to 1800K
- Color Consistency:** Range within a 3-MacAdam Ellipse
- Color rendering (CRI):** 90 CRI

Driver


- Dimming:** 1% dimming standard with 0.1% option
Dimmer switch must be capable of dimming less than 5% (Lutron DIVA is recommended)
- Ripple:** Industry leading Low ripple
- Efficiency:** Power Factor >0.9
Efficiency over 85%
Class 2 output for safety
- Installation:** Small Footprint allows retrofit installations

Reflector

Faceted Reflector

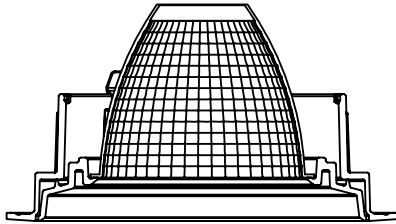

Smooth Reflector

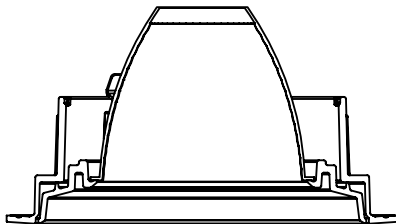



Installation

- For new and retrofit installations
- Easy installation with spring loaded tabs
- Simple connection between fixture and driver via quick connect


Construction / Finish

- Satin powder coated finish
- Custom finishes are available
- Cast Aluminum Trim
- Rated for damp locations
- Made in Canada


Artemis 2 Fixed Downlight

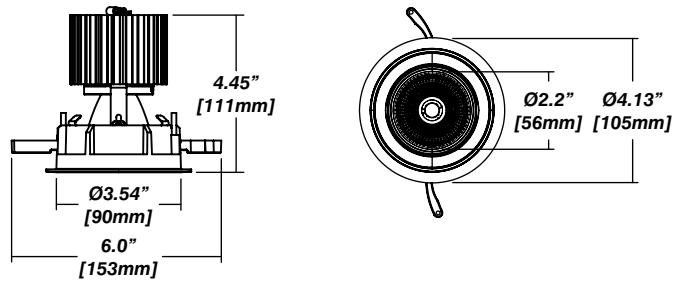

Artemis 2 Adjustable

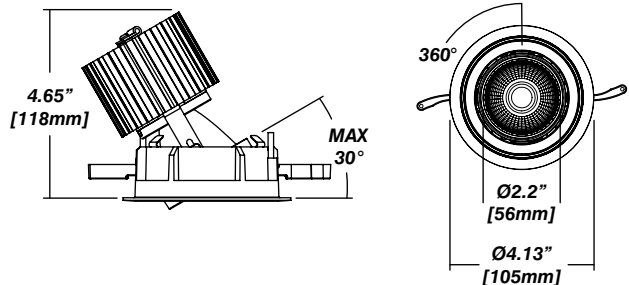

Artemis 2 Wall Wash

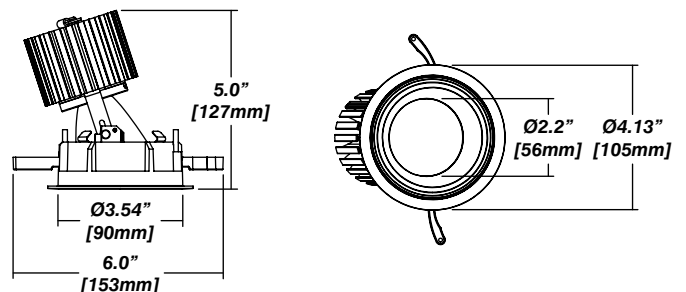





ARTEMIS 2 WD

RECESSED DOWNLIGHT W/ WARM DIM



Housing Options

Standard Senso Housing - 910

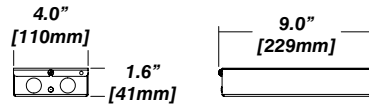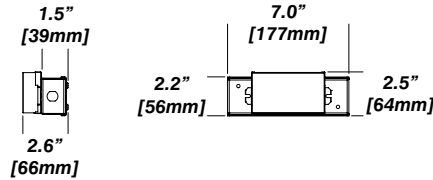




Dimension

Included

Unless specified otherwise, this is provided as standard

- Driver with enclosure**
 - Galvanized steel enclosure
- Installation**
 - Laying on top of ceiling
 - Remote from fixture
 - Hanger bar and mount included

New Construction - 915


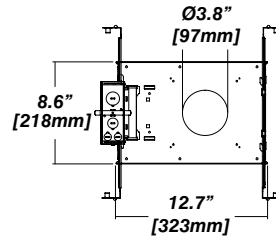
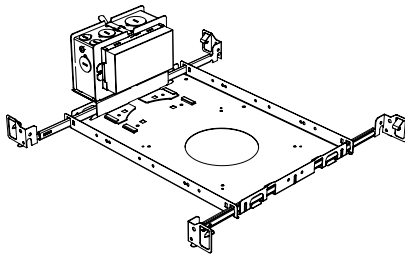


Dimension

Included

- Plaster Frame**
 - Galvanized steel construction with cut-out
- Bar hanger**
 - Length: from 14-3/16" to 26"
- Outlet Box**
 - Outlet Box Included (910 included with trimless)

IC Housing - 920

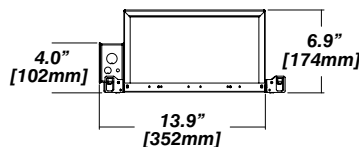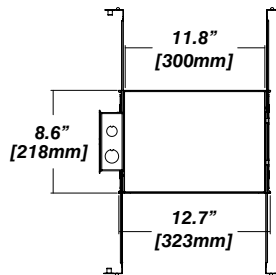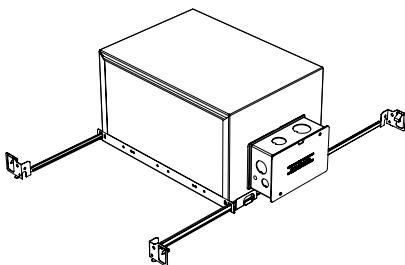

Dimension

Included

- IC Housing**
 - Galvanized steel construction
 - Airtight
 - Includes gasketed junction box
- Plaster Frame**
 - Galvanized steel construction
- Bar hanger**
 - Length: from 14-3/16" to 26"

Note: use only with LED modules up to 1500lm

