

LETO 11 S Wet

WET RATED SURFACE MOUNT LED DOWNLIGHT



Leto 11 S Wet - Wet Rated Surface Mount LED Light. Leto 11 S is a large cylinder surface mounted LED designed as an all purpose light. It is perfect for creating even light throughout your space without distracting from your design. Sealed clear or frosted lenses prevent the entry of water thus allowing greater versatile design options both inside and outside.

Ordering Code

Fixture	688							
	1	2	3	4	5	6	7	8
Driver			--	--				
	1	2	3	4				

Product Specifications

SAMPLE: Fixture **688 - A90 - 610 - 27 - 07 - CL - 08 - 02** | Driver **STD - 120 - A90 - 07**

1 - Model	2 - CRI/LED	3 - Optic	4 - CCT	5 - Lumen	6 - Accessory	7 - Body Color
688 · Leto 11 S Wet	A90 · 93+ CRI Accuracy	<i>Faceted</i> 610 · 10° 618 · 18° 630 · 30° 645 · 45° 660 · 60° <i>Smooth</i> 630S · 30° 645S · 45°	25 · 2500K 27 · 2700K 30 · 3000K 35 · 3500K 40 · 4000K 65 · 6500K	07 · 700 (6.1W) 10 · 1000 (9.1W) 15 · 1500 (14W) 20 · 2000 (19.8W)	CL · Clear Lens DL · Diffusing Lens	<i>Standard</i> 01 · White 02 · Black 08 · Silver <i>Premium</i> 52 · Mocha 53 · Charcoal 54 · Cerulean 55 · Firebrick XX · RAL
8 - Baffle Color	1 - Driver	Dim Level	Dim Level	2 - Voltage		
<i>Standard</i> 01 · White 02 · Black 08 · Silver <i>Premium</i> 52 · Mocha 53 · Charcoal 54 · Cerulean 55 · Firebrick XX · RAL	STD · Non Dimming LCS · 0 - 10 Volt Protocol DIM · Phase ^{1/2} ELDOLC · EldoLED 0 - 10 Volt ² DALI · Dali Protocol ²	N/A 1% 1% 0.1% 0.1%	LUTES · Hilume Ecodigital ² LUT2W · 2 Wire for phase ^{1/2} DMX · SENSO ² EMG · Emergency Driver ^{2/3} CSMB · Casambi Wireless Control ^{2/3}	120 · 120V 277 · 277V 347 · 347V ^{3/4}		

3 - LED	4 - Lumen
Same as Fixture	Same as Fixture

¹ 120V only
² driver mounted remotely from fixture body and j-box
³ second driver required
⁴ not available with ELDO, Lutron or DMX

Project : _____
Quantity : _____
Type : _____
Notes : _____

LETO 11 S Wet

WET RATED SURFACE MOUNT LED DOWNLIGHT



Reflectors

Senso metal spun faceted reflectors are specifically designed to retain as much light as possible. This results in a more power efficient fixture with a higher delivered lumen.

Faceted Reflector




Installation

- Mounting plate included
- Easy, single motion installation method
- Wet Rated from mounting surface down. Plenum/sofit space to be sealed

Construction / Finish

- High quality, scratch resistant powder coated finish in standard, premium or custom colors
- Sealing ring color matched with baffle color
- GORE® vented shade
- Factory sealed aluminum extruded body for optimized elemental resistance
- Made in Canada

Dimensions

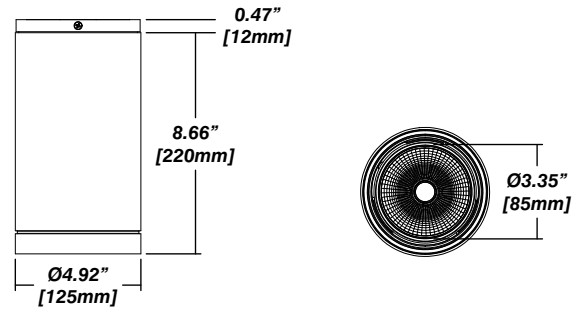

Accessories

Clear Lens



Diffusing Lens



LETO 11 S Wet

WET RATED SURFACE MOUNT LED DOWNLIGHT



Photometrics

Senso's in-house photometric testing ensures that our lighting design can match your needs precisely. Our Goniophotometer and testing lab produces on-demand photometry files based on any specified fixture, including LM-79 Test reports, IES Files, and CRI/CCT measurements. See Sensolighting.com for more information.

**Full photometric Reports and IES files available for every configuration*

Color Metrics

TM 30-15

Our clients deserve the best information possible about their lighting choices. That's why Senso has invested in the Illuminating Engineering Society (IES) TM 30-15, a new system that measures an LED light source's color rendering properties. Using Senso's state-of-the-art goniophotometer, this method identifies the optimal light source for your project and helps evaluate the trade-offs between efficacy and color rendering. Senso can provide TM 30-15 data for all of our products.

**Full Color Metric Info Available at Sensolighting.com*

LED Module Performance

Output: Up to 113 lumen/Watt

Efficacy: Color consistency within a 3-MacAdam Ellipse

CCT: 2500K - 6500K

Color Rendering: 93+ CRI

Min. R Values: R⁹- 60 R^f- 90 R^g- 100

Driver and Power Consumption

Dimming: 1% dimming standard with 0.1% option
Casambi wireless control available

Ripple: Industry leading Low ripple

Efficiency: Power Factor >0.9

Efficiency over 85%

Class 2 output for safety

Installation: Remote mounted

Lumen Option	700lm	1000lm	1500lm	2000lm
Fixture Wattage	6.1W	9.1W	14W	19.8W
Delivered Lumen	656lm	1035lm	1539lm	1917lm

Leto Light Distribution: Reflector

